


Produktinformation

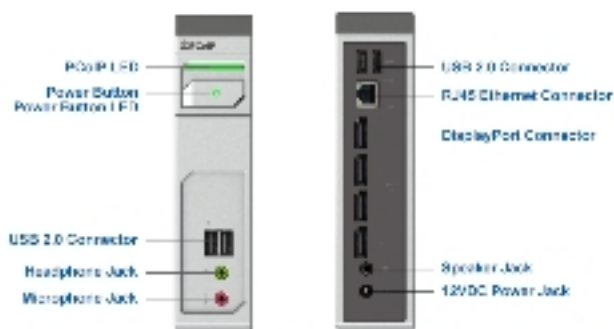

Information

Tillverkare Leadtek Research
Artnr TERA2140-DP-RJ45

TERA2140 Quad-DP Zero Client RJ45 incl. 1 year Teradici Desktop Access

Specifikation

Orderable item, expected delivery time approx. 3-5 days. TERA2140 Series Max Number of Displays 4 Processor TERA2140 Imaging Performance 50 Mpps (VDI) 250 Mpps (Workstation)* Maximum Resolution Two 3840x2160 (DP model only)*** Two 2560x1600 Four 1920x1200 Memory Type 512 MB DDR3 Device Physical Dimensions 7.21 (height) x 5.22 (length) x 1.76 (thinness) inches without stand Power Management Full Wake-on-LAN and Wake-on-USB Typical Device Power 12W Encryption AES-128/AES-256 Suite B Ciphers (Workstation) Connectors Single-link DVI-D or DisplayPort connector Second Single-link DVI-D or DisplayPort connector Third Single-link DVI-D or DisplayPort connector Forth Single-link DVI-D or DisplayPort connector (or Two Dual-link DVI-D with adapters) Two front USB 2.0 connectors** (Smart card reader zero clients have one front USB connector) Two rear USB 2.0 connectors Smart Card Reader port (Optional) Headphone jack Microphone jack Speaker jack RJ45 or Fiber Ethernet connector 12VDC Power jack LED PCoIP LED Zero Client Power Button LED Button Zero Client Power Button Thermal Cooling Solution Passive heat sink Operating System Support Completely operating system independent Package Content PCoIP Zero Client Power adaptor and power cord Ethernet cable (Optional) Dual-link DVI adapter cables (Optional for TERA2140 Quad-DVI and TERA2321 Dual-DVI zero clients)*** Quick installation guide VESA mount package (Optional)